


2P/24V(500A) 5µs¼†50 (STANAG 4074)

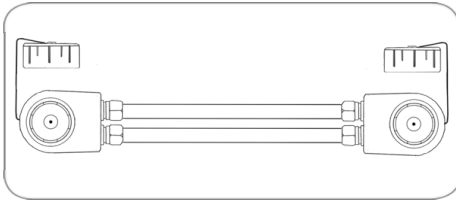

Art.Nr.
Part. No.

ä°šā°·ç¼¼	ç"µç¼¼†
ā·¥ā,š	ā†·ç"è½¼!
èš°æ°°	2
ç"µāž:	24
éç·ā@šç"µæµ·	500.0
æ ‡ā††	STANAG 4074
æ°·ā°'èçžæž¥æ°°é‡·	2
èè¼¼èè¼¼/ç°°æœ¬	ā--æ²¹
ā°šè°«æ°°æ--™	é²æš' é†'ā±ž
ā°šè°«éçœè°²	é»'è°²
ç«"ç°-ç°°æœ¬	æç°°é"èā,½
ç«"ç°-æ°°æ--™	æç¼¼f¶¶
ç«"ç°-éçœè°²	é»'è°²
æž¥èš¼æ°·éçœè°²	é»'è°²
æž¥èš¼ç°°æœ¬	æž¥èš¼é°
æž¥èš¼è¼¼é°ç	é°¶¼°Ag¼¼°°
æž¥èš¼¼¼šéç,ç"°āžæœçā°šæ°é°çé°ççš¼¼°mm¼¼°ā¼¼ç°ç	70.0
ç"µç¼¼†ç°çé°çā°¼¼°ç±¼¼°°	3.6
ç"µç¼¼†ç°çé°çā°¼¼°è°ç±ā°¼¼°°	144.0
çèççŸ·æ°°èç°	n.a.
Berechnete_Produktbezeichnung	2P/24V(500A) ç"µç¼¼†ç°ç (STANAG 4074)
KEYWORDS	2P,24V,500A,Leitung,STANAG 4074,652074