


2P/24V(500A) 5µs¹/₄†5° (STANAG 4074)

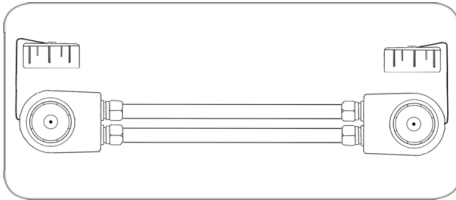

Art.Nr.
Part. No.

â°šă°•ç¼°	ç"µç¼†
ă°¥ă,š	ă†°ç"è½†
èš°-æ°°	2
ç"µăž:	24
éč°ă@šç"µæµ•	500.0
æ †ă††	STANAG 4074
æ°•ă°'èçžæž°æ°•é†°	2
è°¼°è°¼/ç°°-æœ°-	ă°-æ²¹
ă°šè°«æ°•æ-™	é²æš°é†°ăžž
ă°šè°«éčœè°²	é»'è°²
ç«°-ç°-ç°°-æœ°-	æç°°é"°ă,½
ç«°-ç°-æ°•æ-™	æç°¼é†°
ç«°-ç°-éčœè°²	é»'è°²
æž°¥èš¼æ°•éčœè°²	é»'è°²
æž°¥èš¼ç°°-æœ°-	æž°¥èš¼é°
æž°¥èš¼è¼°é°č	é"°¼°Ag¼°¼°
æž°¥èš¼¼šéé,ç"°ă°žæœéă°šæ°°é°čé°čçš°¼°mm²¼°ă°ă°¼°ç°ç	70.0
ç"µç¼†ç°çé°çă°¼¼°ç±³¼°°	4.2
ç"µç¼†ç°çé°çă°¼¼°èç±ă°¼¼°°	165.0
ç°ççç°-æ°•èç°	n.a.
Berechnete_Produktbezeichnung	2P/24V(500A) ç"µç¼†ç°ç (STANAG 4074)
KEYWORDS	2P,24V,500A,Leitung,STANAG 4074,652075