


2P/24V(500A) 5µs¼†50 (STANAG 4074)

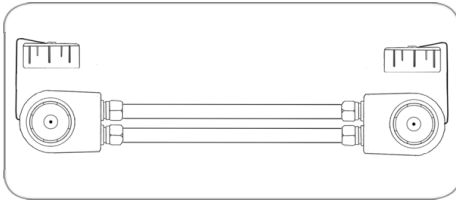

Art.Nr.
Part. No.

â°šă°•ç¼¼	ç"µç¼¼†
ă°¥ă,š	ă†•ç"°è½¼!
èš°-æ°°	2
ç"µăž:	24
é¢•ă@šç"µæµ•	500.0
æ †ă††	STANAG 4074
æ°•ă°'è¸žæž¥æ°°é†•	2
è®¼è®¼/ç°°æœ¬	ă-æ²¹
ă°šè°«æ°•æ-™	é²æš°é†'ăžž
ă°šè°«é¢œè°²	é»'è°²
ç«°-ç°°-æœ¬	æ£°°é"®ă,½
ç«°-ç°°-æ°•æ-™	æ®¼èf¶
ç«°-ç°°-é¢œè°²	é»'è°²
æžž¥èš¼æ°•é¢œè°²	é»'è°²
æžž¥èš¼ç°°æœ¬	æžž¥èš¼é°
æžž¥èš¼èj°é•¢	é"¶¼°Ag¶¼°°
æžž¥èš¼ššéé,ç"°ă°žæœéă°šæ°é•¢é•¢çš°¼°mmž¼°ă°¼°ç°¸	70.0
ç"µç¼¼†ç°¸é°¸ă°¶¼°ç±ž¼°°	10.0
ç"µç¼¼†ç°¸é°¸ă°¶¼°è±žă°¶¼°°	393.0
ç®¶çž°-æ°•è¸°	n.a.
Berechnete_Produktbezeichnung	2P/24V(500A) ç"µç¼¼†ç°¸ (STANAG 4074)
KEYWORDS	2P,24V,500A,Leitung,STANAG 4074,652077